



Copyright TENSOR AB

AHA-500 SERIES

The 500 series comprises low weight hand tools for cutting out sections in wiremesh and can also cut the corners clean. The tool is available in three sizes for 4-6 mm wire diameter.

The 500 tools have a turnable cutting blade with 2 cutting edges.

The 500 tools are hydraulically operated with a maximum pressure of 210 Bar.

The 500 tools are CE marked.


The 500 tools are very easy to handle and operated by the switch.

Patent pending.

Recommended powerpack units:
AHP-A1, pneumatic pump.
AHP-2030, electric pump.

Dimensions (mm):

	A
AH-504	16,5
AH-505	14,5
AH-506	12,5

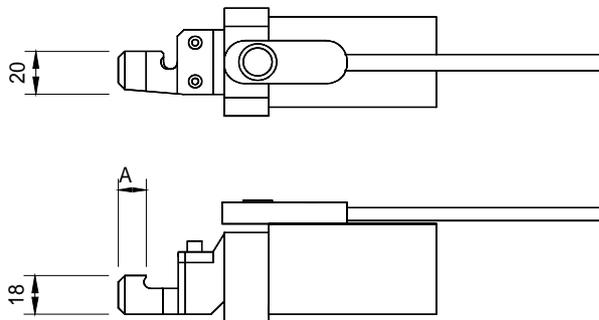


Accessories:
Hosekit AH-SL
Extended handle
Foot operated

CUTTING DATA WIRE DIAMETER:

Tensile Strength N/MM	AHA-504	AHA-505	AHA-506
550:			6
800:		5	
1250:	4		

WEIGHT: 1.0 1.0 1.0 KG

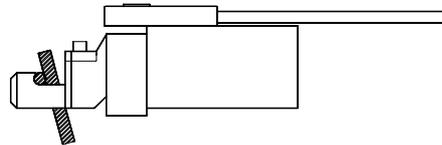

AHA-506 in operation.

SPECIFICATION:

CUTTER Mesh cutter **AHA-50a**

a= Max dimension:

mm	4	-----
	5	
	6	

TEN0003

Subject to alteration without previous notice.

Distributed by: B. W. Darrah, Inc.
115 S. 4th Avenue, St. Charles, IL 60174
(630) 584-1900 Fax: (630) 584-2599