



Copyright TENSOR AB

# AHA-200 SERIES

The 200 series are wire shears with an extremely low weight, made for cutting wire, spring wire, mesh, prestressed wire etc

The 200 tools are hydraulic operated with a maximum pressure of 210 Bar.

The 200 tools are CE marked

The 200 tools are very easy to handle and operated by switch on the handle.

Recommended powerpack units:

AHP-2030, electric pump

AHP-2060, electric oil pump

Accessories:

Hosekit AH-SL

Extended handle


Different type of blades to suit application

Double acting

Foot operated

## DIMENSIONS (mm):

	A	B	C	D	E	F	G	H
<b>AHA-210</b>	57	17	16	78	37	270	130	115
<b>AHA-216</b>	91	19	28	110	39	370	200	150
<b>AHA-222</b>	122	30	38	142	56	460	230	175

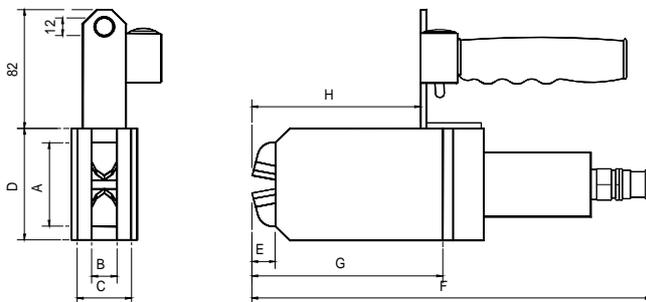

TEN0003



## CUTTING DATA WIRE DIAMETER:

<u>Tensile Strength</u> N/mm <sup>2</sup>	AHA-210	AHA-216	AHA-222
350:	10	16	22
700:	8	11	17
1100:	5	11	14
1800:	5	5	10
1800*:	3*3	7*3	7*4.1

\*Prestressed concrete wire

## CUTTING TIME:

Pump unit

AHP-2030	0,7	1,4	-
AHP-2060	-	-	2,5

**WEIGHT:** 2.3                      4.7                      15 Kg

## SPECIFICATION:

CUTTER Wire shear

a= Max dimension:

mm    10  
       16  
       22

b = Return type:

Spring    = 1  
Hydraulic = 2

AHA-2aa-b

Subject to alteration without previous notice.

Distributed by: B. W. Darrah, Inc.  
115 S. 4th Avenue, St. Charles, IL 60174  
(630) 584-1900 Fax: (630) 584-2599